


## LUBRINA HYDRO 46/68

LUBRINA HYDRO series is universal anti-wear hydraulic oil design comply with major hydraulic equipment manufacturers.

LUBRINA HYDRO series is formulated to exceed Denison, Vickers, DIN 51524, Cincinnati Machine and U.S. Steel hydraulic equipment standard for exceptional anti-wear and power transfer ability.

LUBRINA HYDRO series offers good anti-wear and anti-foaming characteristics to promote wear protection for extending use of hydraulic equipments.

### LUBRINA HYDRO SERIES TECHNICAL SPECIFICATION

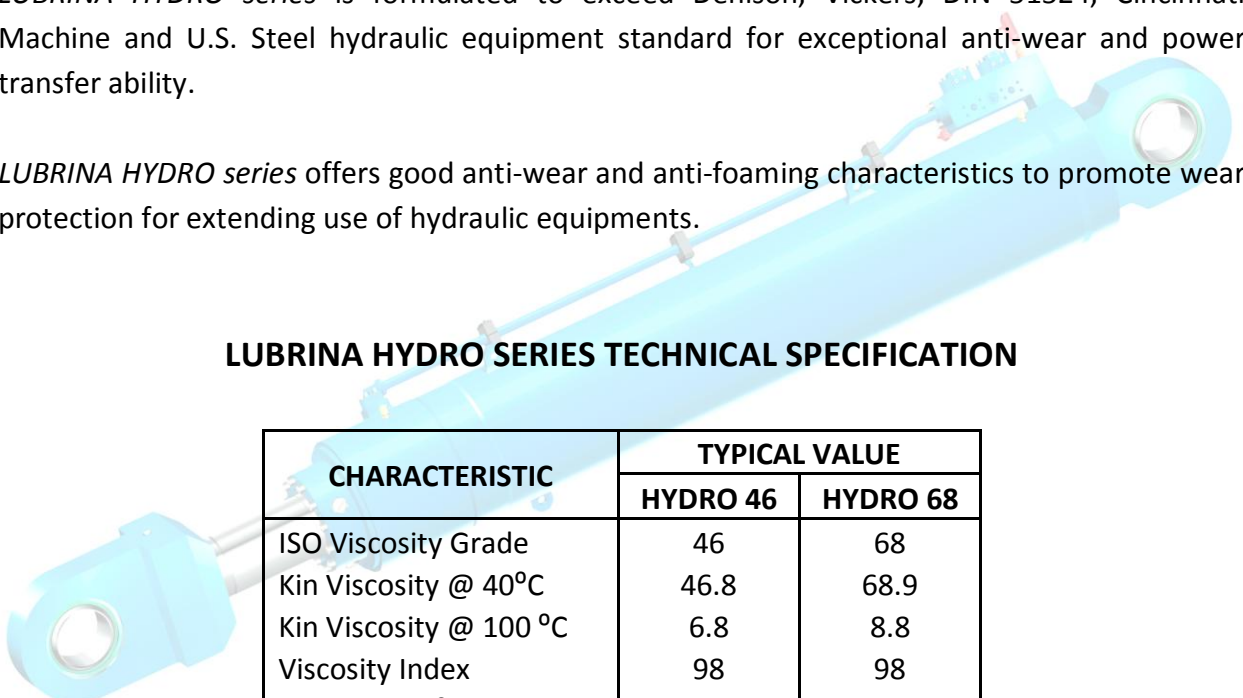

CHARACTERISTIC	TYPICAL VALUE	
	HYDRO 46	HYDRO 68
ISO Viscosity Grade	46	68
Kin Viscosity @ 40°C	46.8	68.9
Kin Viscosity @ 100 °C	6.8	8.8
Viscosity Index	98	98
Flash Point, °C	235	235
Pour Point, °C	-6	-6
Vickers Vane Pumping	Pass	Pass
Foaming Characteristics	Pass	Pass

